

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS



Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

CERTIFICATION

This is to certify that this report is original and was compiled by TAIWO Akintunde Bankole (PPCE/APR24/337)

I attest that this report is for a project he was full involved with during his time at **Beyondscape Associates Limited**, and his role was that of Project Architect.

Oluwafemi DADA (F/2396)



Supervisor's Signature & Date

Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

PROJECT B

TABLE OF CONTENT

Certification

1.1 Introduction -----6

1.2 Inception-----6

1.3 Brief taking-----7

1.4 Concept design-----7

1.5 Consultant selection and coordination-----8

1.6 Design development-----8

1.7 Specifications-----9

1.8 Budget estimate-----12

1.9 Construction documentation-----12

1.10 Tender process-----13

1.11 Contract management-----14

1.12 Close out-----15

1.13 Conclusion, lessons learn-----16

DATA SHEET	
PROJECT TITLE	STRUCTURAL ENGINEERS: MAF Consortium (Consulting Civil/Structural engineers)
RESIDENTIAL DEVELOPMENT AT KFARMS	NO 5, 7 TH Avenue off Alaafin Avenue Oluyole estate Ibadan Oyo state
LOCATION: ABIMBOLA WILLIAMS STREET	
KAY FARM ESTATE IJU LAGOS STATE	MECHANICAL ENGINEERS; MAF Consortium (Consulting Civil/Structural engineers)
GPS LOCATION: 6°39'40"N 3°20'17"E	NO 5, 7 TH Avenue off Alaafin Avenue Oluyole estate Ibadan Oyo state
CLIENT; CAPT TOLULOPE KOLAWOLE	
ARCHITECTS: BEYONDSCAPE ASSOCIATES LTD	ELECTRICAL ENGINEERS; MAF Consortium (Consulting Civil/Structural engineers)
NO 4B Adediran Ajao Crescent Anthony Village, Lagos	NO 5, 7 TH Avenue off Alaafin Avenue Oluyole estate Ibadan Oyo state

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS

QUANTITY SURVEYOR: D-5 PYRAMID LIMITED

D23, 378, HFP east line shopping complex, Ajah, Lagos

MAIN CONTRACTOR; Safe House Construction Ltd.

Block D2, 377, East Line Shopping Complex, Abraham Adesanya, Ajah, Lagos

MECHANICAL SUB-CONTRACTOR: Ridoh plumbing works

Ltd

No 22 Akinrinlo Street, Somolu, Lagos

ELECTRICAL SUB-CONTRACTOR: Solo-tech electrical enterprises

No29 Popoola Street bariga Lagos

WINDOW/ALUMINUM SUB-CONTRACTOR: Jakak Faith Ventures Ltd.

Supo Gbabe Street off Community Road Meiran Lagos

JOINERY SUB-CONTRACTOR: Kas-Matrix Works Ltd

No.13 Redemption Crescent, Industrial estate, Gbagada Lagos

Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS



GPS LOCATION: 6°39'40"N 3°20'17"E

Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

1.1 INTRODUCTION

This project report details the design development, construction documentation, tender and contract administration stages for the Development of Private residential building for a family of 4 in Lagos.

The author designed and supervised the construction under the supervision of Arc. Oluwafemi Dada.

The report is requisite for the author's qualification to undertake the Architects Competence Programme. It consists of write-up and appendix containing related documentation drawings and sample formats of professional tools used in executing the project.

1.2 INCEPTION 8 - 11 OCTOBER 2019

In October 2019, a private client contacted BEYONDSCAPE to provide architectural consultancy services in developing his personal residence. He just acquired a piece of dry land within a gated estate in the Iju, a suburb of Lagos. The land measured 604 square meters and was already fenced on all sides.

The client shared his vision of providing modest accommodation for his young family. As a man with keen interest in architecture, design and good eyes for details, he was particular about achieving the delivery of extremely neat and modern design.

1.3 BRIEF TAKING 12 OCTOBER 2019

On visiting the site for the first time, the client gave his brief verbally and jotted down the desires, A storey building purposely designed as a single family house with the following listed:

GROUND FLOOR

- Main living room with dinning area to serve 8 people incorporated.
- Big modern size kitchen with island worktop with 2 store rooms, dry and wet store
- Study room
- Entrance lobby
- Visitors toilet
- Guest bedroom with ensuite toilet and shower
- One room maid's room with toilet and shower ensuite facing away from the main house

FIRST FLOOR

- Ample sized master bedroom with terrace, sitting area, 2 separate walk-in wardrobes for madam and master
- Bathroom for master bedroom with shower area and double vanity bowls
- Family living room with terrace
- Bedroom with toilet and shower ensuite
- Bedroom with toilet and shower ensuite

RXTERNAL AREA

- Ample parking area interlocked to receive cars
- Security gatehouse with toilet and shower

1.4 CONCEPT DESIGN 14 - 19 OCTOBER 2019

The concept idea was to have a cosy family friendly house designed with maximum comfort to accommodate average sized family, servants and guests.

Architectural expression is geared toward a modern style, yet not a style limited to certain times and region. Clean straight lines were dominant. Relieves and bands on external walls to

accentuate windows, define roofs and 'lift' the structure off the ground. Double volume entrance porch that gives master bedroom direct view of the frontal part of the building and the street, yet protected from weathering elements.

Large windows are installed to ensure proper ventilation, all room were deliberately designed to have cross-ventilation

The aim of the whole design are the following:

- Comfort
- User friendly
- Clean, sharp modern design
- Timeless and attractive architecture

All building regulations in relation to designs were fully achieved while working on the design.

1.5 CONSULTANTS SELECTION AND COORDINATION – 21

OCTOBER 2019

As architects and lead consultant on the project, BEYONDSCAPE was charged with putting together the rest of the consultancy team.

This was done by leveraging off time-tested working relationships; so most members of the Consultancy Team had worked together on several projects over numerous years, and had a good synergy.

We put together a document stating our proposal for the Consultancy Team members and this included Company Profiles and detailed information on past projects, with particular emphasis on projects of similar scale which had been undertaken jointly.

This was forwarded to the client and approval was given for the 1 consultants to provide pre and post approval contract services.

1.6 DESIGN DEVELOPMENT

21 OCTOBER – 8 NOVEMBER 2019

Preliminary floor lay-out and 3D views were shared with the client. While he was satisfied with the façade, he requested for bigger master bedroom and kitchen. He also made clear his preference for roof slates over long-span aluminium and clearly visible roof design.

Reviewed design and cost estimate were then shared with client who was satisfied with the final conclusion.

Updated drawings were shared with the rest of the Consultancy Team and coordinated design development began in earnest.

This included but was not limited to the following:

- Input from M& E and Structural Engineers
- Budget Estimate and project cost analysis
- Client Review
- Implementation of client feedback from design review
- Preliminary review with Planning Authorities
- Implementation of planning authority comments
- Sign off by client.

Some of the documents submitted for Planning Approval included, but were not limited to:

- i. 3 year tax clearance
- ii. 5 sets of signed and sealed Architectural drawings
- iii. 5 sets of signed and sealed Structural drawings
- iv. 5 sets of signed and sealed M&E drawings
- v. Environmental Impact Assessment Report

1.7 SPECIFICATIONS

20 OCTOBER – 6 NOVEMBER 2020

Specifications were mainly captured by annotation on Architectural and M&E Drawings, and detailed drawings at larger scales were prepared to highlight additional information and specifications on the project.

Majority of the specifications were captured in the Tender Bills of Quantities, and subsequently in the Contract Bills of Quantities.

Schedule of finishes was prepared by BEYONDSCAPE taking into consideration durability, aesthetics, and Client's preferences into utmost consideration.

The main contractor provide physical samples for approval

FINISHES

STAIRCASE, KITCHEN

- Floor ; 300mm by 600 mm non-slip vitrified ceramic floor tiles
- Walls : smooth cement/sand wall finish, rendered with POP screed painted finishing coat of emulsion paint
- Ceiling: POP ceiling screed to finish
- Furniture: 900mm by 2100mm HDF flush door
- Windows: powder coated aluminium casement windows with 8mm tinted glass
- The Contractors provided physical samples for the Client's and architect's approval

LIVING ROOMS

- Floor ; 600mm by 600 mm glazed vitrified ceramic floor tiles
- Walls : smooth cement/sand wall finish, rendered with POP screed painted finishing coat of emulsion paint
- Ceiling: POP ceiling screed to finish
- Furniture: 900mm by 2100mm HDF flush door
- Windows: powder coated aluminium casement windows with 8mm tinted glass
- The Contractors provided physical samples for the Client's and architect's approval

BEDROOMS AND LOBBIES

- Floor ;400mm by 4 00 mm glazed vitrified ceramic floor tiles
- Walls : smooth cement/sand wall finish, rendered with POP screed painted finishing coat of emulsion paint
- Ceiling: POP ceiling screed to finish
- Furniture: 750mm by 2100mm HDF flush door

10

- Windows: powder coated aluminium casement windows with 8mm tinted glass
- Ideal standard set of WC and wash basin
- Stainless steel chrome shower stall, mixer taps and other accessories The Contractors provided physical samples for the Client's and architect's approval
- The Contractors provided physical samples for the Client's and architect's approval
- The Contractors provided physical samples for the Client's and architect's approval

- Walls : smooth cement/sand wall finish, rendered with POP screed painted finishing coat of emulsion paint
- Ceiling: POP ceiling screed to finish
- Furniture: 900mm by 2100mm HDF flush door
- Windows: powder coated aluminium casement windows with 8mm tinted glass
- The Contractors provided physical samples for the Client's and architect's approval

EXTERNAL WORKS

- Floor: interlocking paving stone applied to floor all floor area excluding the gardens and flowerbeds
- Wall: natural stones to clad walls at ground floor level
Layers of finishing coat of emulsion paint applied to rendered walls
- Garden; tropical plants, grass and flowers in all garden/flower bed areas
- The Contractors provided physical samples for the Client's and architect's approval

TOILET AND BATHROOM

- Floor ;300mm by 300 mm non-slip vitrified ceramic floor tiles,
200mm by 400mm ceramic wall tiles

1.8 BUDGET ESTIMATE 9– 13 NOVEMBER 2020

D_5 Pyramid limited prepared Preliminary Budget Estimates for every version of the Concept Design; and these always formed part of the Design Presentation to the client, so that the client always had a clear understanding of estimated project costs as the Concept Design progressed. The client reviewed the Budget Estimates and the Final Budget Estimate was included in the Concept Design signoff.

D_5 Pyramid limited were largely responsible for cost planning, value management, feasibility studies, cost benefit analysis, lifecycle costing, tendering, valuation, claims management and cost estimation

1.9 CONSTRUCTION DOCUMENTATION

18-25 NOVEMBER 2020

Detailed construction drawings with specifications were prepared by all the Consultants and included the following:

- Architectural Drawings
- Structural drawings
- Mechanical Drawings
- Electrical Drawings
- Priced Bill of Quantities

Some of the tasks undertaken during Construction Documentation were:

- Further development of working drawings
- Detailed Site Layout and External Works Drawings.
- Review and Coordination Meetings with other Consultants to harmonise drawings.
- Finalization of Key Layouts (Floor plans, Sections, Elevations)
- Finalization of Detailed Layouts (Staircases, Bathrooms, Kitchens)
- Schedules (Room Finishes, Windows, Doors etc.)

1.10 TENDER PROCESS

25 NOVEMBER-6 DECEMBER 2020

Selective tendering was employed on this project. We worked with the client to compile a list of tenderers to be invited for the project. The criteria for suitable tenderers included:

- Proven track record in the timely delivery of projects of similar sizes and complexity.
- Proven expertise in the Nigerian Construction Industry

Invitations to Tender were sent to the selected tenderers and included the following documents:

- i. Article of Agreements
- ii. Tender Drawings – Architectural, M&E, and Structural drawings.
- iii. Condition of contracts
- iv. Instruction to tenderers, including dates for the return of completed Tenders.
- v. Form of tender and Bill of quantities.

Tenders were submitted to D-5 Pyramid Limited and were opened during a Tender Opening Meeting, with the Consultants and client present.

D-5 Pyramid Limited subsequently analyzed the Tenders and submitted a Tender Analysis Report to the client and consultants. Based on the Tender Analysis Report, the Preferred Contractors for various aspects of work were identified and invited for Tender Clarifications and Negotiations. D-5 Pyramid Limited made their recommendations to the client, and these were agreed with BEYONDSCAPE who subsequently issued a Letter of Award to Safehouse Construction Company Ltd. once client approval was obtained.

1.11 CONTRACT MANAGEMENT

11 JANUARY 2021- 8 APRIL 2022

The form of building contract under which SAFEHOUSE CONSTRUCTION COMPANY was engaged is a Lump-sum contract with quantities. Their conditions of contract clearly stipulate a schedule of percentage payments corresponding to specific milestones as enumerated in the contract agreement. Therefore, all valuations were made at those specific 4 stages of works (the 5th stage and final was determined as completed works

The project was financed by the client; for which payments were made in advance, and so, an Advanced Payment Guaranty APG from a reputable bank was requested from the contractor.

My duties during the contract management included:

- Coordination of the contractor's possession of site, reviewed and approved the work programme.

- Supervising and coordinating the construction works and other consultants' input , ensure adherence to specifications
- Co-coordinating and presiding over monthly site meetings, technical meetings, as well as other site visits
- Issue Architect's payment certificates
- Prepare and submit quarterly progress report.
- Issuance of Architects site instructions, revised designs and additional drawings and details
- Issuance of Architects material and component sample approvals and material test approvals.
- Certification all works executed on site in accordance with specifications.
- Inspection off-site materials intended for the project at point of origin.
- Attending special meetings and consultation with client.
- Production of special reports and documentation.

- Overseeing and supervised the testing and commissioning of equipment and collate relevant technical reports.

that would be required at the time of close out. Grouping this information together in a separate section of the specifications what was required to be done, by whom, to achieve substantial and total performance.

1.12 CLOSE OUT MAY 2022

Close Out is the process of rounding up the contract between the client and the contractor. On project, the foundation for project closeout was laid during the contract documentation stages by the inclusion of the Close Out requirements in the Contract.

Diligent documentation throughout the construction period also helped make it easier to track and measure completeness of various work packages.

The following tools were utilized on this project:

- Contract Requirements for Closeout D-5 Pyramid Limited had clearly specified in a separate section in the contract documents, what was required to meet Substantial Performance and all the documentation


- Job Start Up Meeting The following the members of the Construction Team were invited to the meeting: Architect, Engineers, Main Milestones for submittals and completeness were established, followed by regular meetings to review compliance. Plans for Quality Assurance and Quality Control were reviewed, and included the submission of samples, details of what inspections will be done, independent testing and inspection agencies, Schedule of Values to be used for payment certification – project Schedules, etc.
- Contractors' Logs; The contractor was prepared with a list of what was to be included as part of the Handover documents
- Snag Lists; BEYONDSCAPE prepared a Master

- Snag List, which was issued to the main contractor and relevant sub-contractors. A snag-rectification period was agreed, after which BEYONDSCAPE carried out further snag inspections to confirm compliance.

1.13 CONCLUSION, LESSONS LEARNT

Being fully involved from inception to handover. It provided me with valuable experience right from Concept Design, through Design Development, Design Coordination, Construction Documentation and Site Supervision, all the way to Handover and Close Out. This helped immensely my professional development as an Architect. I learnt the importance and advantage of having a strong and cohesive Consultancy Team.

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS

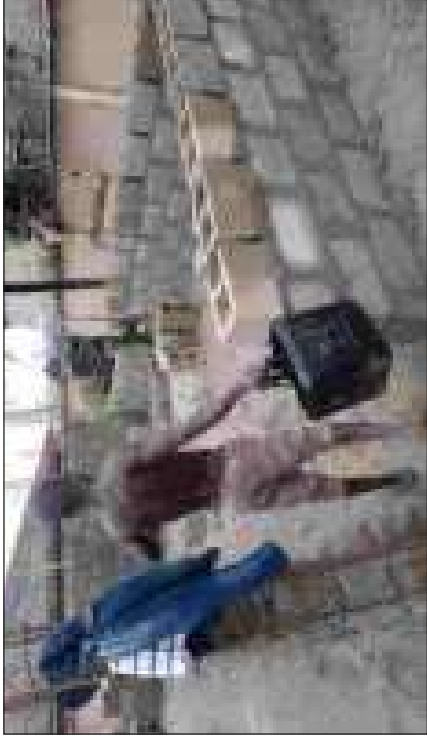


Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS



Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS

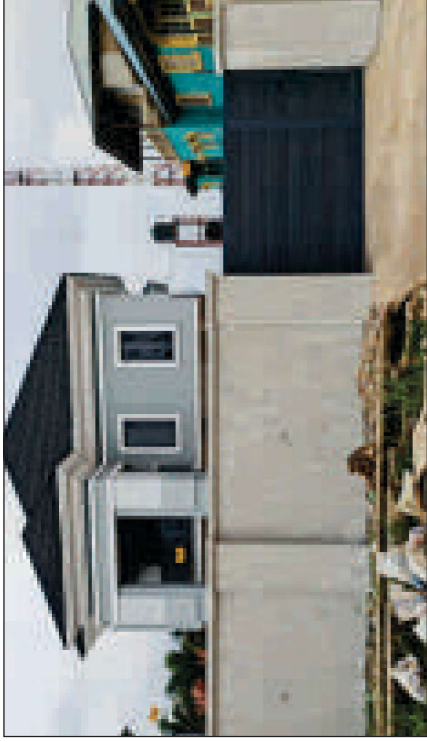

Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**

PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS



Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**


PROJECT B: RESIDENTIAL DEVELOPMENT AT KFARMS



Candidate's name: **TAIWO Akintunde Bankole**
Candidate's number: **PPCE/APR24/337**
Supervisor's name: **Arc. Oluwafemi Dada**



 **BEYONDSCAPE**

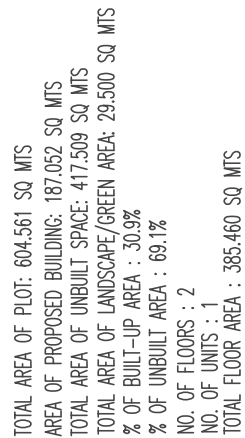

BEYONDSCAPE
ASSOCIATES LIMITED
1, Yent Ogunmuyi Street
Addis Ababa, Ethiopia
Anthony Villagras, Lagos
Tel: 00352012635, 08059678170
Email: beyondscape@yahoo.com

PROPOSED RESIDENTIAL DEVELOPMENT FOR:
MR TOLUPOLE OLADIPO KOLAWOLE
ARIMOLA WILLIAMS STREET
CHIEF ROTIMI WILLIAMS ESTATE , OBANOLE, IJU ISHAGA
IFAKO IJAYE GOVERNMENT AREA
IJAGOS STATE

JOB

PROPOSED RESIDENTIAL DEVELOPMENT FOR:

MR TOLULOPE OLADIPO KOLAWOLE

ABINIBOLA WILLIAMS STREET

CHIEF ROTIMI WILLIAMS ESTATE , OBAWOLE, IJU ISHAGA

IFAKO IJAYE GOVERNMENT AREA

LAGOS STATE

STATUS OF DRAWING

preliminary for information

preliminary for information

Accepted for tender

Issued for lender

DWG TITLE: PLANS

SITE PLAN

DRAWN BY:

SCALE:


DATE:

CONC NO.	FILE NAME;	REV;
----------	------------	------

FILE NAME:

REPLY:

1806/201

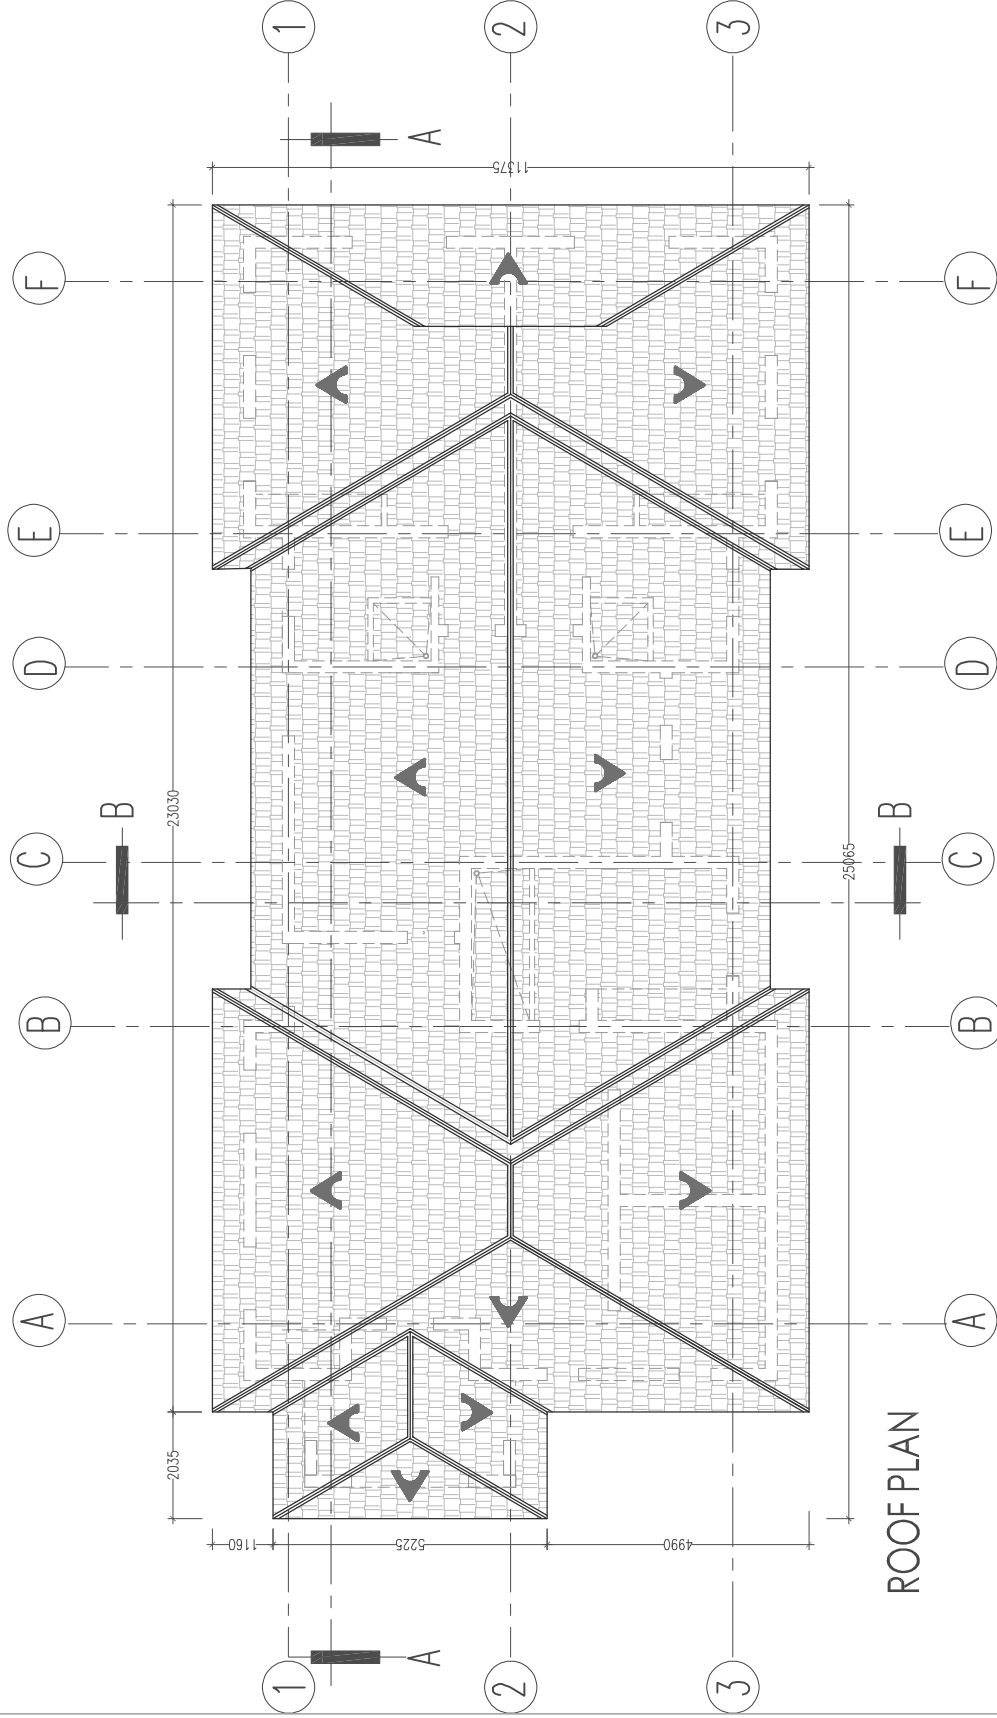

ROOF PLAN


BEYONDSCAPE
ASSOCIATES LIMITED
15th Queens Road
Ardara, Lagos
Tel: 0803272836, 0806629170
Email: beyondscape@beyondscape.com

JOB
PROPOSED RESIDENTIAL DEVELOPMENT FOR:
MR TOLUPE OLADPO KOLAWOLE
ABIBOLA WILLIAMS STREET
CHIEF ROTIMI WILLIAMS ESTATE, OBIANILE, LUI ISHAGA
IFKO LAKE GOVERNMENT AREA
LAGOS STATE

STATUS OF DRAWING
preliminary for information
issued for planning approval
issued for tender
issued for construction

DWG TITLE	PLANS
ROOF PLAN	
DATE: JUNE 2019	SCALE: 1 : 100

DWG NO.	FILE NAME	REV
1806/204		

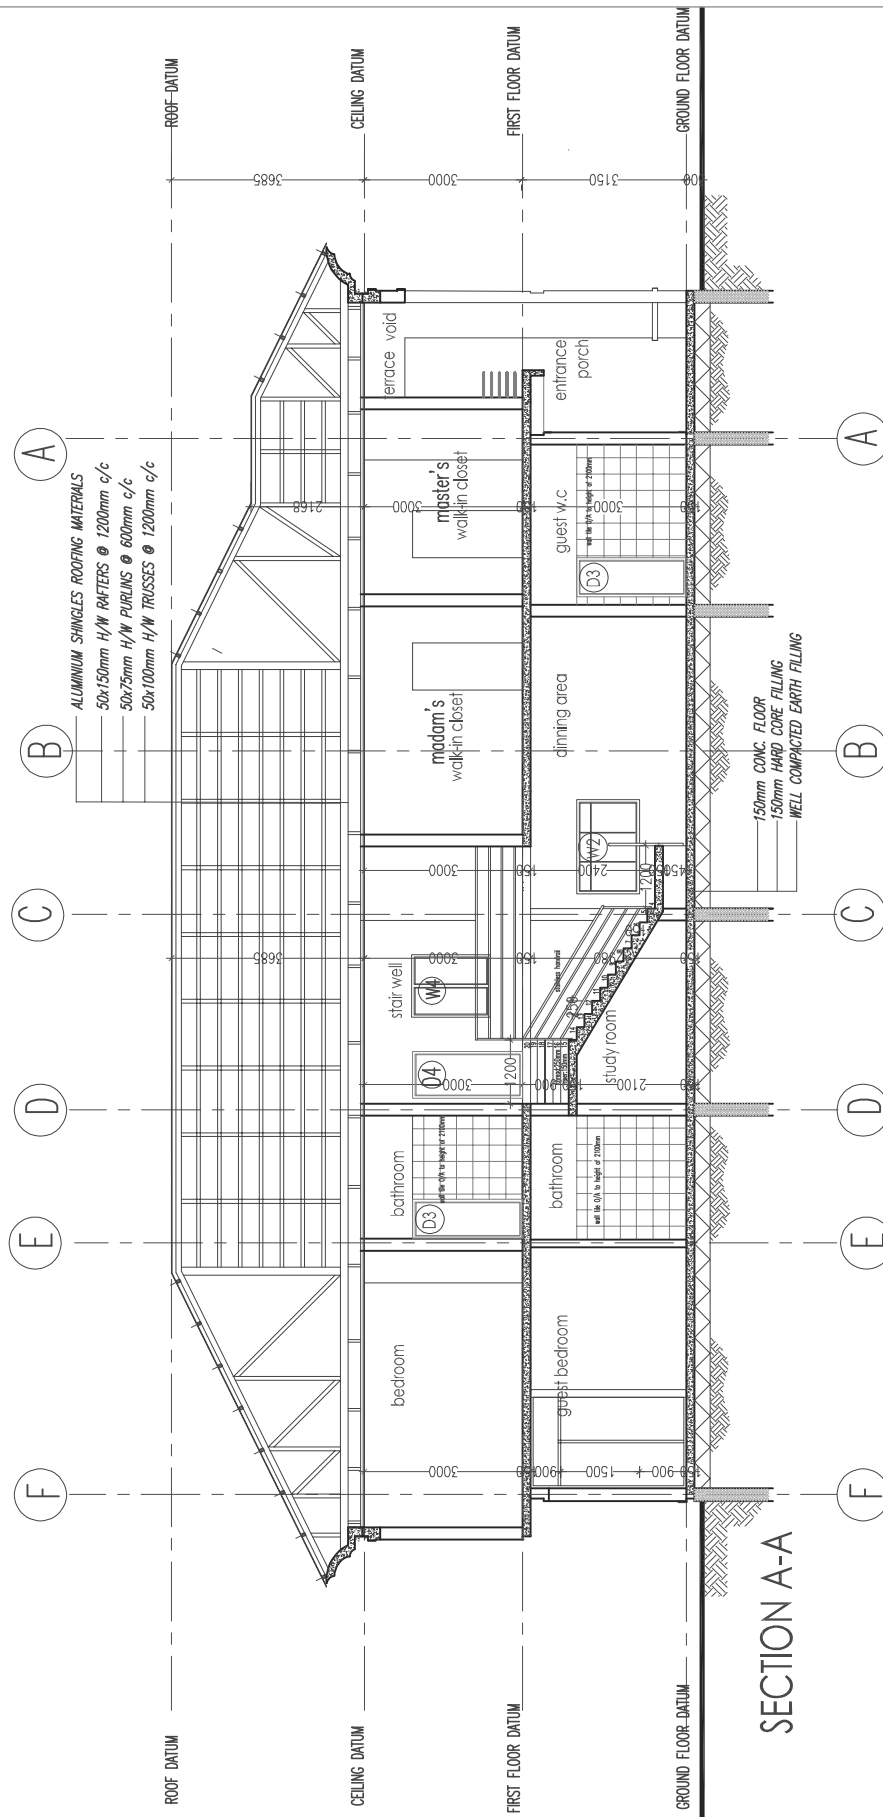

DWG NO.	FILE NAME;	REV;
1806/		
205		

DWG TITLE: SECTION A-A'	DATE: JUNE 2019	SCALE: 1 : 100	DRAWN BY: AKINTUNDE TAYO
---------------------------------------	-------------------------------	------------------------------	--

STATUS OF DRAWING	
preliminary for information	
issued for planning approval	
issued for tender	
issued for construction	

JOB

PROPOSED RESIDENTIAL DEVELOPMENT FOR:-

MR TOLULOPE OLADIPO KOLAWOLE


ABURULA WILLIAMS STREET

CHEF ROTIMI WILLIAMS ESTATE - ORAWOLE, ILM KSHAGA

IFAKO LANE GOVERNMENT AREA

LAGOS STATE

IBB BEYONDSCAPE
ASSOCIATES LIMITED
1,1st Floor, Oppanjali Street
Andheri West, Mumbai
Maharashtra 400 053, India
Tel: 022-26023333, 26023334, 26023335
Fax: 022-26023336, 26023337
E-mail: ibb@beyondscape.com

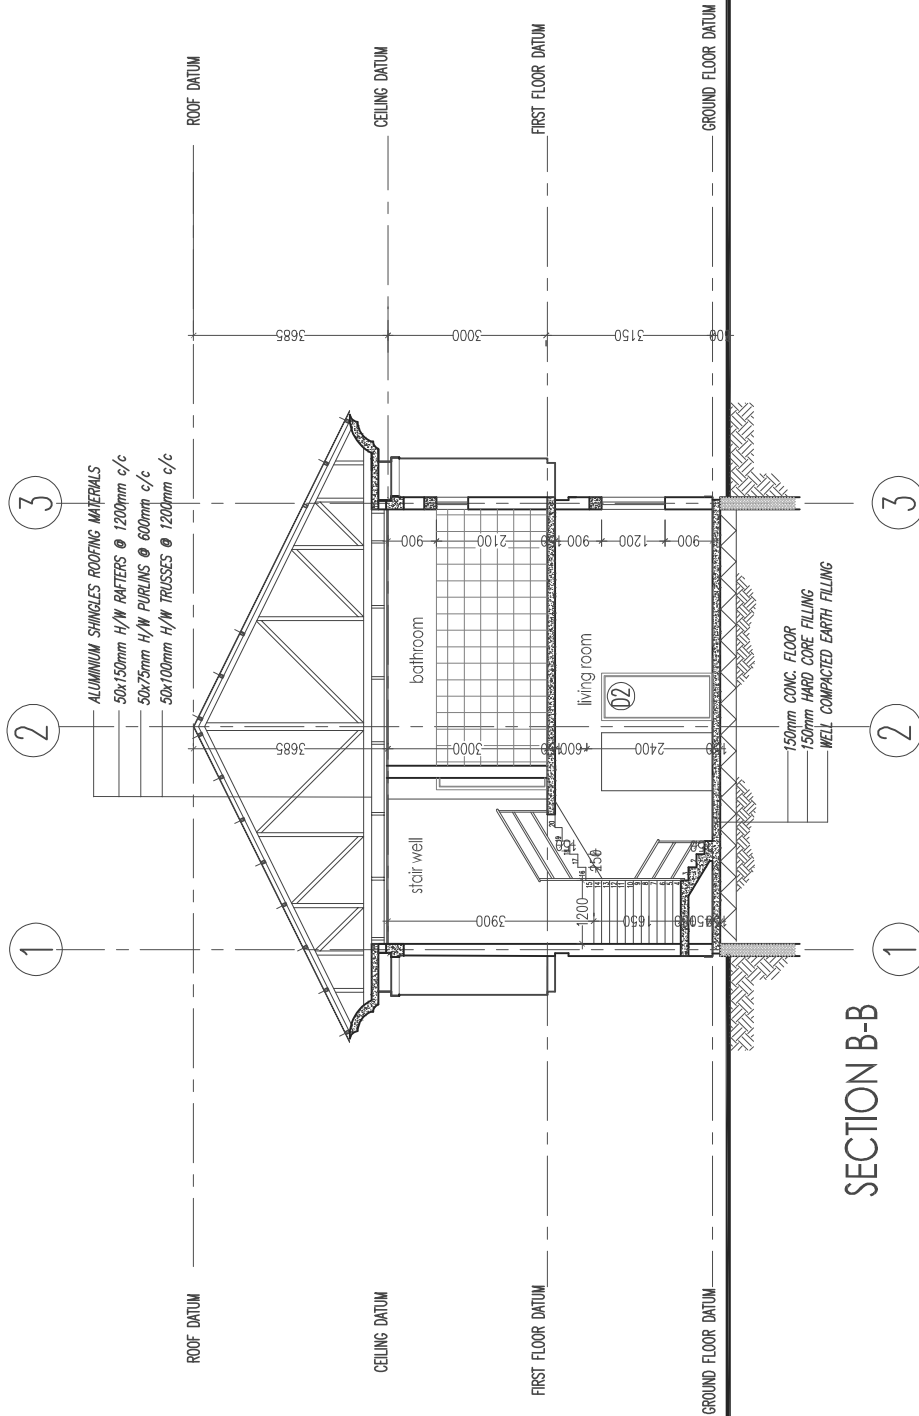


BEYONDSCAPE
ASSOCIATES LIMITED
11, West Ojo Street
Ajah, Lagos
Tel: 08032012830, 08096781770
Email: beyondscape@yahoo.com

JOB: PROPOSED RESIDENTIAL DEVELOPMENT FOR:
MR TOLUPOLE OLADIPO KOLAWOLE
ABIMOLA WILLIAMS STREET
CHIEF ROTIMI WILLIAMS ESTATE, OGBOMOLE, LAGOS STATE

STATUS OF DRAWING:
preliminary for information
Issued for planning approval
Issued for tender
Issued for construction

DWG TITLE: **SECTION B-B'**
DATE: JUNE 2019
SCALE: 1 : 100
DRAWN BY: AKINTUNDE TAYO

DWG NO: **1806/206**
FILE NAME:
REV:

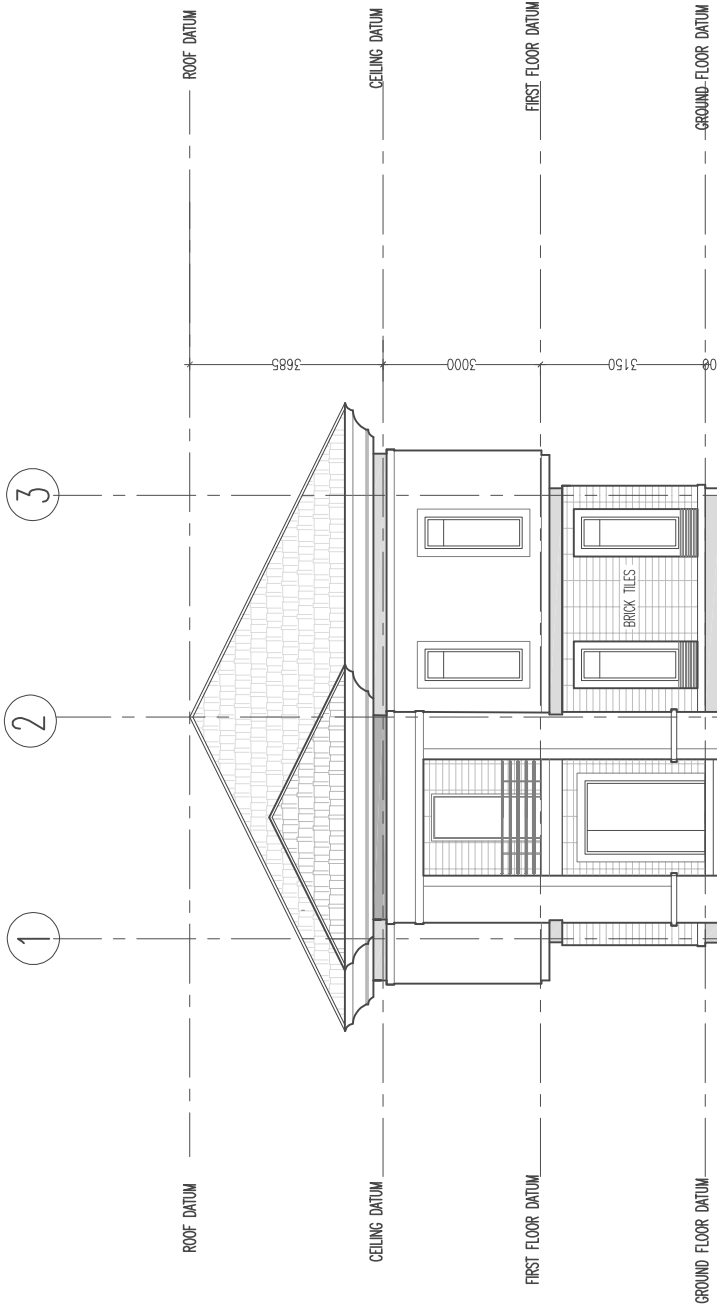

SOUTH ELEVATION




BEYONDSCAPE
ASSOCIATES LIMITED
1 West Quarters Street
Aberdeen City Centre
Aberdeen, Scotland
Tel: 01224 201200, 01224 201270
Email: info@beyondscape.co.uk

JOB: PROPOSED RESIDENTIAL DEVELOPMENT FOR:
MR TOLUPE OLAPOLO KOLAWOLE
ABIMOLA WILLIAMS STREET
CHIEF ROTIMI WILLIAMS ESTATE, OGBOMOLE, LAGOS STATE
LAGOS STATE

STATUS OF DRAWING
preliminary for information
issued for planning approval
issued for tender
issued for construction

DWG TITLE	DWG NO.	FILE NAME	REV.
SOUTH ELEVATION	1906/207		
DATE:	SCALE:	DRAWN BY:	
JUNE 2019	1:100	ANTHONY TUNO	

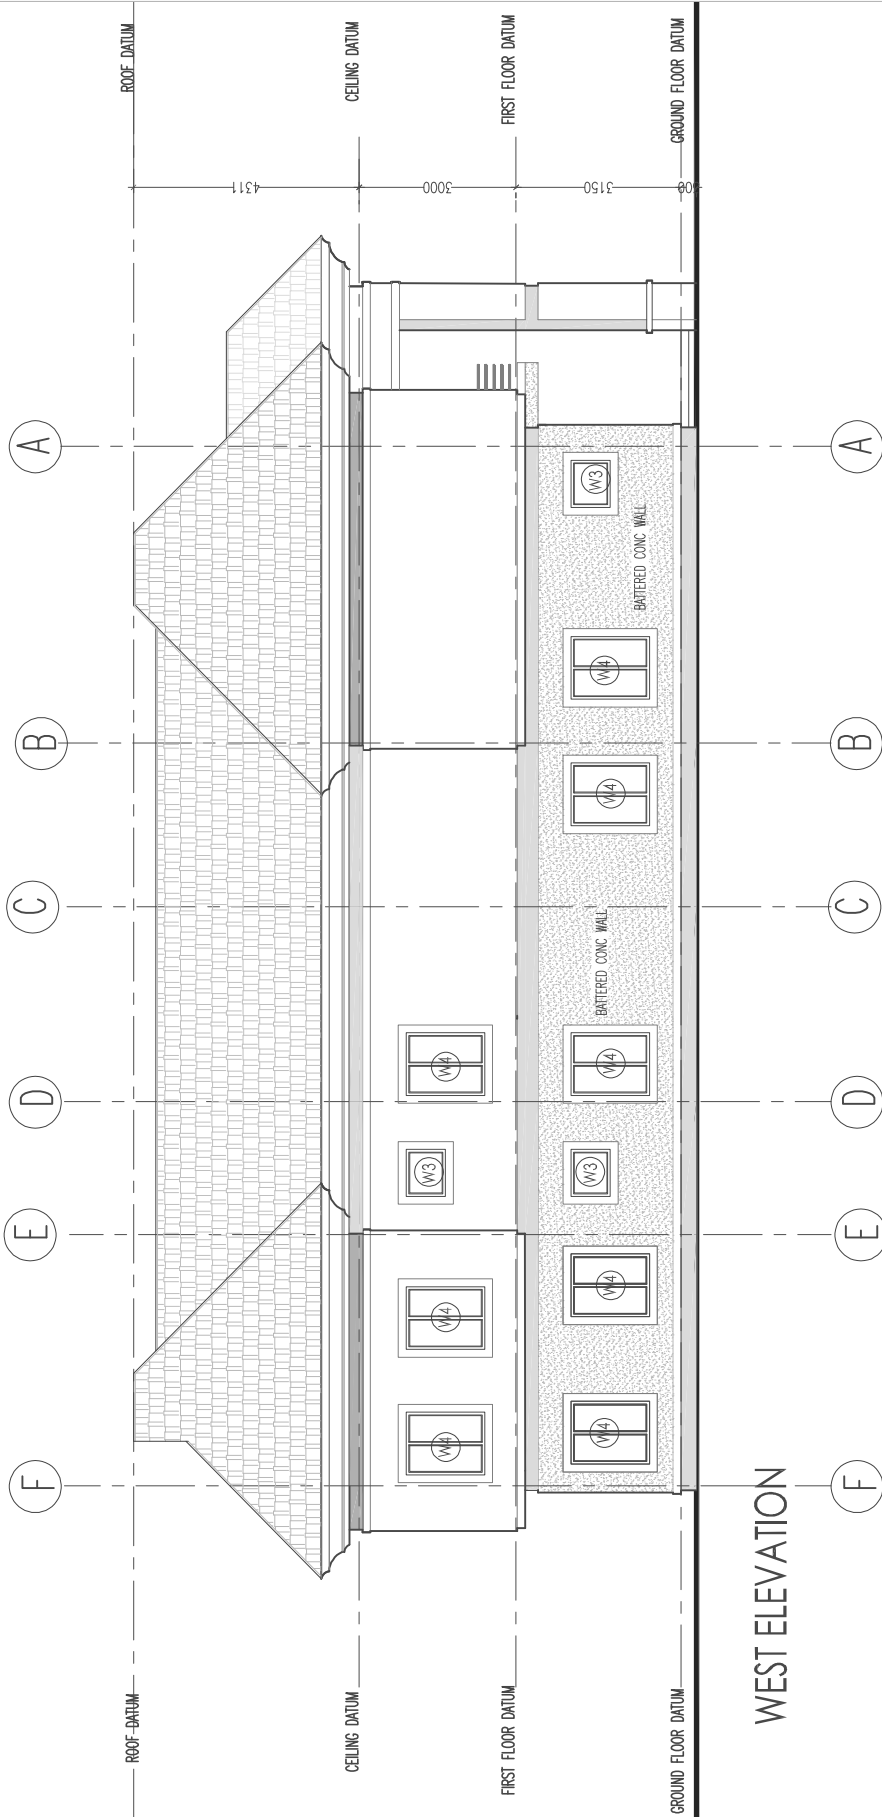


DWG NO.	FILE NAME:	REV:
1806/208		

DWG TITLE:		WEST ELEVATION	
DATE:	SCALE:	DRAWN BY:	
JUNE 2019	1 : 100	AMITKUMAR TANDU	

STATUS OF DRAWING	
preliminary for information	
issued for planning approval	
issued for tender	
issued for construction	

JOB	PROPOSED RESIDENTIAL DEVELOPMENT FOR: MR. TOLULOPE OLADIPO KOLAWOLE ABIMOLA WILLIAMS STREET CHIEF ROTIMI WILLIAMS ESTATE - OGBOMOLE, LUGA ISHGA IFAKO LAKE GOVERNMENT AREA LAGOS STATE
-----	---

BEYONDSCAPE ASSOCIATES LIMITED 1, Yemi Ogunwale Street Audubon Plaza, Lagos Tel: 0803712354, 0803697970 Email: beyondscape@beyondscape.com
--

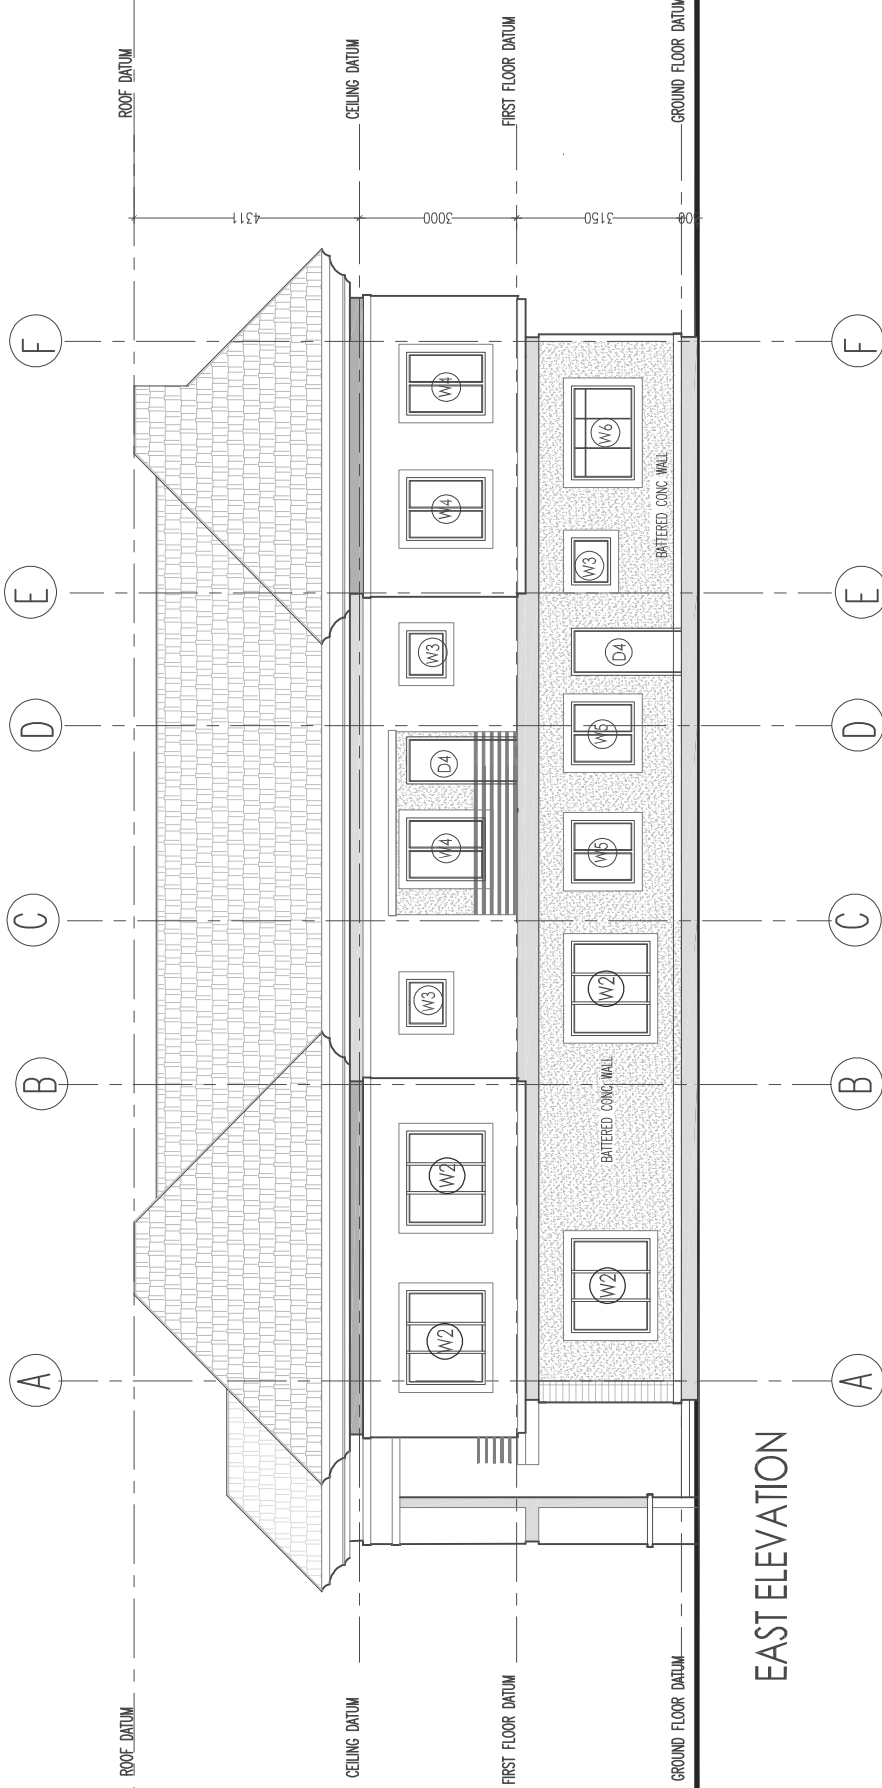


DWG NO.	FILE NAME:	REV:
1806/209		

DWG TITLE: EAST ELEVATION			DRAWN BY: ANTHONY TANDU	
DATE: JUNE 2019		SCALE: 1 : 100		

STATUS OF DRAWING	
preliminary for information	
issued for planning approval	
issued for tender	
issued for construction	

JOB :	PROPOSED RESIDENTIAL DEVELOPMENT FOR: MR. TOLULOPE OLADIPO KOLAWOLE ASHMOOLA WILLIAMS STREET CHIEF ROTIMI WILLIAMS ESTATE - OGBOMOLE, LAGOS STATE
-------	--

BEYONDSCAPE ASSOCIATES LIMITED 1, Yemisi Ogunlesi Street Ashokun Ajele estate Ashokun Village, Lagos Tel: 08037123556, 08050978170 Email: beyondscape@beyondscape.com
--

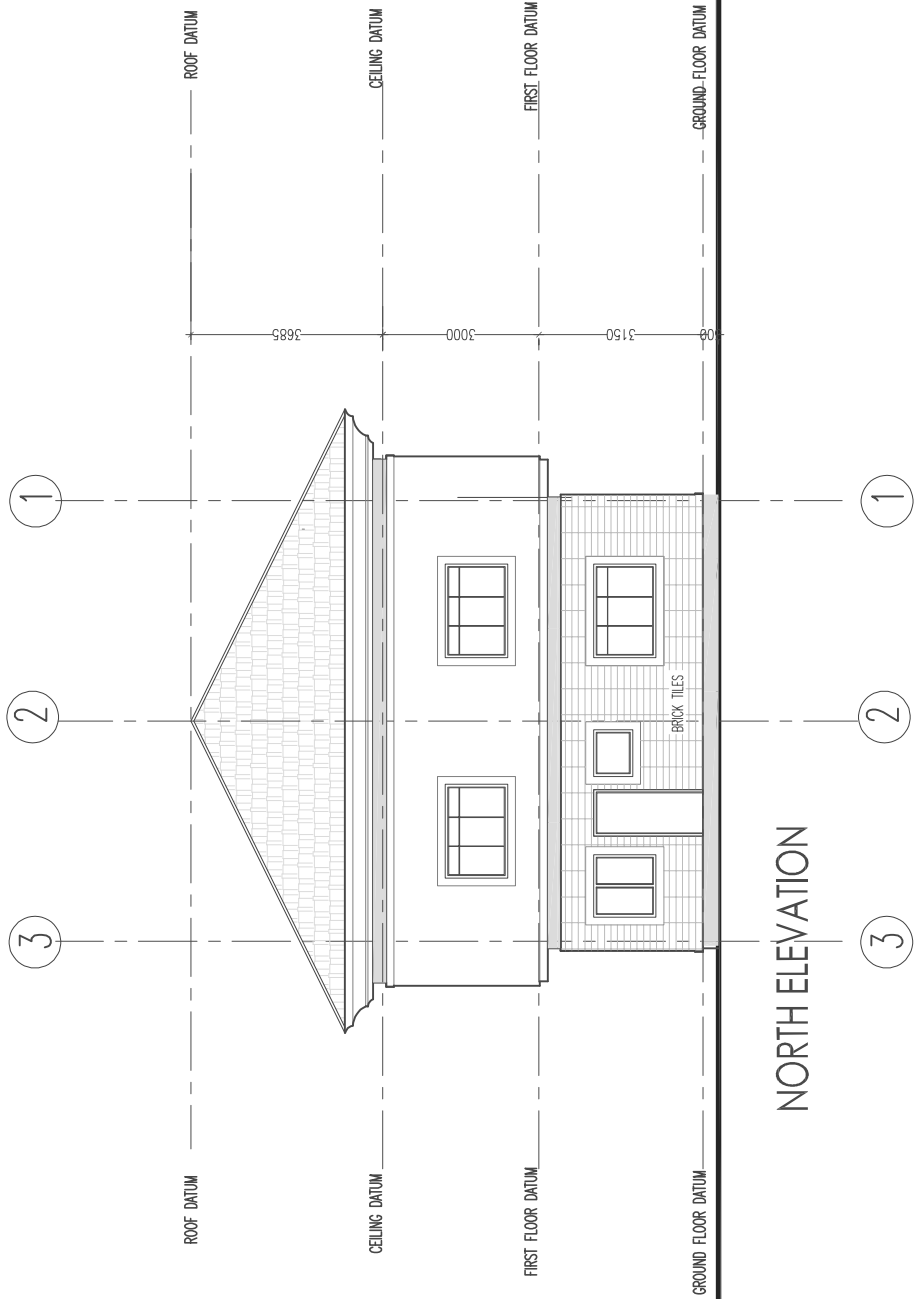

NORTH ELEVATION






DWG NO.	FILE NAME:	REV:
1806/210		


DWG TITLE:	SOUTH ELEVATION		
DATE:	SCALE:	DRAWN BY:	
JUNE 2019	1 : 100	AMINTIME TAYO	

STATUS OF DRAWING	
preliminary for information	
issued for planning approval	
issued for tender	
issued for construction	

JOB	PROPOSED RESIDENTIAL DEVELOPMENT FOR: MR TOLULOPE OLADIPO KOLAWOLE ABINIKU WILLIAMS STREET CHIEF ROTIMI WILLIAMS ESTATE - OGBANOLE, IJO OSHAGA IFAKO JAYE GOVERNMENT AREA LAGOS STATE
-----	--


BEYONDSCAPE ASSOCIATES LIMITED 1,1st Floor, 1st Floor Abiniku Williams Estate Ifako Jaye Government Area Lagos State Tel: 0800 000 0000 Email: beyondscape@yahoo.com
--

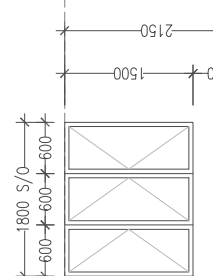structural opening							
structural floor datum		W1		W4		W5	
window type	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass
frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame
quantity	2 + 2 = 4 nos	2 + 2 = 4 nos	8 + 9 = 17 nos	8 + 9 = 17 nos	8 + 9 = 17 nos	1 no	1 no
opening	side hung aluminium casement window	side hung aluminium casement window	side hung aluminium casement window	side hung aluminium casement window	side hung aluminium casement window	top hung aluminium projected window	top hung aluminium projected window
location	living room, master bedroom	living room, master bedroom	living room, study, room, rooms, kitchen, stair well	living room, study, room, rooms, kitchen, stair well	living room, study, room, rooms, kitchen, stair well	Toilet	Toilet
structural opening							
structural floor datum		W2		W3			
window type	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass	off white powder coated aluminium casement window with 6 mm thick grey tinted glass
frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame	off white powder coated aluminium frame
quantity	11 + 10 = 21 nos	11 + 10 = 21 nos	6 + 5 = 11 nos	6 + 5 = 11 nos	6 + 5 = 11 nos		
opening	fixed center panel, 2 side hung aluminium casement window	fixed center panel, 2 side hung aluminium casement window	top hung aluminium projected window	top hung aluminium projected window	top hung aluminium projected window		
location	bedrooms	bedrooms	Toilets, pantry	Toilets, pantry	Toilets, pantry		
JOB		PROPOSED RESIDENTIAL DEVELOPMENT FOR: MR. TOLULOPE OLADIPO KOLAWOLE ABIMOLA WILLIAMS STREET CHIEF ROTIMI WILLIAMS ESTATE, OGBANLE, IJO (SHIGA) IFAO LAKE GOVERNMENT AREA LAGOS STATE		STATUS OF DRAWING		DWG TITLE: WINDOW SCHEDULE	
BEYONDSCAPE ASSOCIATES LIMITED 1, Yemi Ogunlesi Street Ajah, Lagos, Nigeria Tel: 0810 000 0000 Email: beyondscape@yahoo.com				preliminary for information		DWG NO. 1806/301	
				issued for planning approval		FILE NAME:	
				issued for tender		DATE: JUNE 2019	
				issued for construction		SCALE: NTS	
						DRAWN BY: ADEUNKE TANDU	
						REV:	

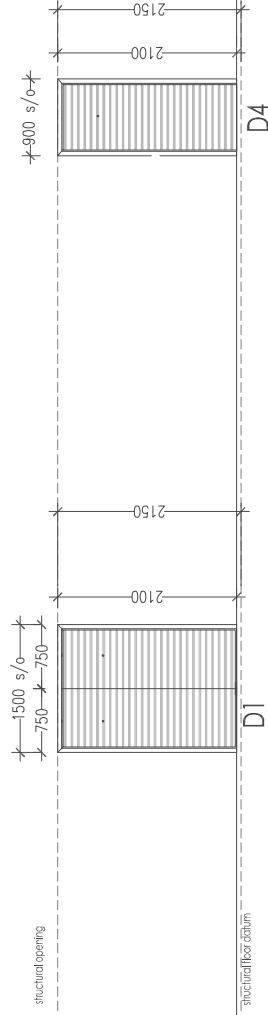

door type	timber security door	door type	timber security door
frame	steel frames with architrave	frame	steel frames with architrave
quantity	1 = 1 no	quantity	2 + 2 = 4 nos
opening	double door, single swing	opening	single door, single swing
location		location	

SECURITY DOOR

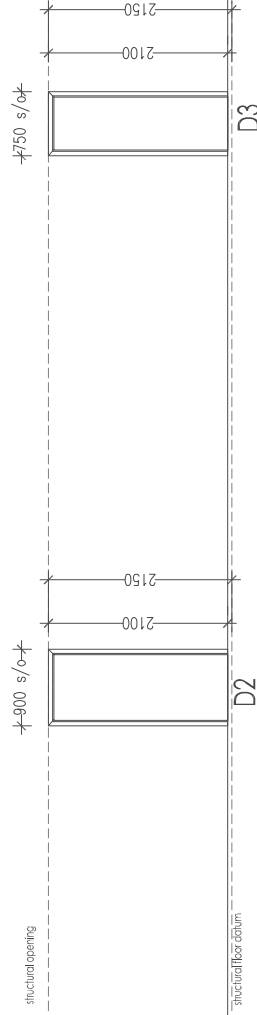

door type	semi-solid laminated timber flush door	door type	semi-solid laminated timber flush door
frame	laminated timber frames with architrave	frame	steel frames with architrave
quantity	3 + 3= 6 nos	quantity	3 + 3= 12 nos
opening	single door, single swing	opening	single door, single swing
location		location	

TIMBER DOOR

 BEYONDSCAPE ASSOCIATES LIMITED 1, First Okunribido Street Adabori, Lagos Lagos State, Nigeria Tel: 01-2612345678 Email: info@beyondscape.com	JOB: PROPOSED RESIDENTIAL DEVELOPMENT FOR: MR TOLUPOLE OLADIPO KOLANOLE ABIMOLA WILLIAMS STREET CHIEF ROTIMI WILLIAMS ESTATE, OBANOLE, IAO OSHAKA IFAKO LANE, GOVERNMENT AREA LAGOS STATE	STATUS OF DRAWING		DWG NO.		FILE NAME:	REV:	
		preliminary for information		1806/		302		
		issued for planning approval						
		issued for tender						
		issued for construction						
DWG TITLE: DOOR SCHEDULE DATE: JUNE 2019 SCALE: N/S DRAWN BY: AKINTUNDE TANDU								